## Inexact saddle point solvers and their limiting accuracy

Pavel Jiránek<sup>1,2</sup>, Miroslav Rozložník<sup>1,2</sup>

Faculty of Mechatronics and Interdisciplinary Engineering Studies, Technical University of Liberec, Czech Republic  $^{\mathrm{L}}$ 

and

Institute of Computer Science, Czech Academy of Sciences, Prague, Czech Republic<sup>2</sup>

Gene Golub Day at TU Berlin, February 29, 2008


# Workshop on Solution Methods for Saddle Point Systems, Hong Kong Baptist University, October 31, 2007



# Workshop on Solution Methods for Saddle Point Systems, Hong Kong Baptist University, October 31, 2007



# Workshop on Solution Methods for Saddle Point Systems, Hong Kong Baptist University, October 31, 2007

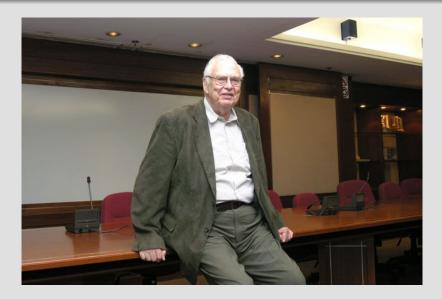

### Saddle point problems


We consider a saddle point problem with the symmetric  $2\times 2$  block form

$$\begin{pmatrix} A & B \\ B^T & 0 \end{pmatrix} \begin{pmatrix} x \\ y \end{pmatrix} = \begin{pmatrix} f \\ 0 \end{pmatrix}.$$

- A is a square  $n \times n$  nonsingular (symmetric positive definite) matrix,
- ullet B is a rectangular  $n \times m$  matrix of (full column) rank m.

Applications: mixed finite element approximations, weighted least squares, constrained optimization etc. [Benzi, Golub, and Liesen, 2005].

## $\begin{tabular}{ll} inexact solutions of inner systems + rounding errors \\ &\rightarrow inexact saddle point solver \\ \end{tabular}$

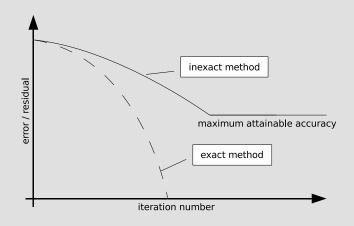

### Schur complement reduction method

ullet Compute y as a solution of the Schur complement system

$$B^T A^{-1} B y = B^T A^{-1} f,$$

ullet compute x as a solution of

$$Ax = f - By$$
.

Systems with A are solved inexactly, the computed solution  $\bar{u}$  of Au=b is interpreted an exact solution of a perturbed system

$$(A + \Delta A)\bar{u} = b + \Delta b, \ \|\Delta A\| \le \tau \|A\|, \ \|\Delta b\| \le \tau \|b\|, \ \tau \kappa(A) \ll 1.$$

## Iterative solution of the Schur complement system

$$\begin{array}{l} \text{choose } y_0, \text{ solve } Ax_0 = f - By_0 \\ \\ \text{compute } \alpha_k \text{ and } p_k^{(y)} \\ y_{k+1} = y_k + \alpha_k p_k^{(y)} \\ \\ \text{solve } Ap_k^{(x)} = -Bp_k^{(y)} \\ \\ \text{back-substitution:} \\ \textbf{A: } x_{k+1} = x_k + \alpha_k p_k^{(x)}, \\ \textbf{B: solve } Ax_{k+1} = f - By_{k+1}, \\ \textbf{C: solve } Au_k = f - Ax_k - By_{k+1}, \\ x_{k+1} = x_k + u_k. \\ \end{array} \right) \\ \text{inner iteration} \\ \\ t_{k+1}^{(y)} = r_k^{(y)} - \alpha_k B^T p_k^{(x)} \\ \end{array}$$

## Measure of the limiting accuracy

The limiting (maximum attainable) accuracy is measured by the ultimate (asymptotic) values of:

- **1** the Schur complement residual:  $B^T A^{-1} f B^T A^{-1} B y_k$ ;
- **Q** the residuals in the saddle point system:  $f Ax_k By_k$  and  $-B^Tx_k$ ;
- **3** the forward errors:  $x x_k$  and  $y y_k$ .


#### **Numerical example:**

$$\begin{split} A &= \mathrm{tridiag}(1,4,1) \in \mathbb{R}^{100 \times 100}, \ B = \mathrm{rand}(100,20), \ f = \mathrm{rand}(100,1), \\ \kappa(A) &= \|A\| \cdot \|A^{-1}\| = 7.1695 \cdot 0.4603 \approx 3.3001, \\ \kappa(B) &= \|B\| \cdot \|B^{\dagger}\| = 5.9990 \cdot 0.4998 \approx 2.9983. \end{split}$$

## Accuracy in the outer iteration process

$$B^{T}(A + \Delta A)^{-1}B\hat{y} = B^{T}(A + \Delta A)^{-1}f,$$
$$\|B^{T}A^{-1}f - B^{T}A^{-1}B\hat{y}\| \le \frac{\tau\kappa(A)}{1 - \tau\kappa(A)}\|A^{-1}\|\|B\|^{2}\|\hat{y}\|.$$

$$|| - B^T A^{-1} f + B^T A^{-1} B y_k - r_k^{(y)}|| \le \frac{O(\tau) \kappa(A)}{1 - \tau \kappa(A)} ||A^{-1}|| ||B|| (||f|| + ||B|| Y_k).$$



## Accuracy in the saddle point system

$$-B^{T}A^{-1}f + B^{T}A^{-1}By_{k} = -B^{T}x_{k} - B^{T}A^{-1}(f - Ax_{k} - By_{k})$$

$$||f - Ax_k - By_k|| \le \frac{O(\alpha_1)\kappa(A)}{1 - \tau\kappa(A)} (||f|| + ||B||Y_k),$$


$$|| - B^T x_k - r_k^{(y)}|| \le \frac{O(\alpha_2)\kappa(A)}{1 - \tau\kappa(A)} ||A^{-1}|| ||B|| (||f|| + ||B||Y_k),$$

$$Y_k \equiv \max\{||y_i|| \mid i = 0, 1, \dots, k\}.$$


Back-substitution scheme		$\alpha_1$	$\alpha_2$
A:	Generic update	$\tau$	u
	$x_{k+1} = x_k + \alpha_k p_k^{(x)}$		a l
B:	Direct substitution	$\tau$	$  \tau  $
	$x_{k+1} = A^{-1}(f - By_{k+1})$	,	
C:	Corrected dir. subst.	u	$\tau$
	$x_{k+1} = x_k + A^{-1}(f - Ax_k - By_{k+1})$		,

additional system with A


## Generic update: $x_{k+1} = x_k + \alpha_k p_k^{(x)}$

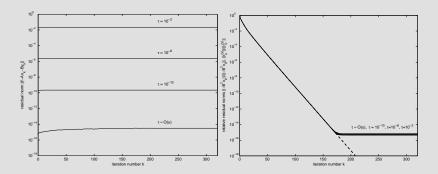

## Direct substitution: $x_{k+1} = A^{-1}(f - By_{k+1})$

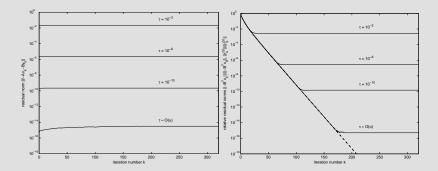

## Corrected direct substitution: $x_{k+1} = x_k + A^{-1}(f - Ax_k - By_{k+1})$

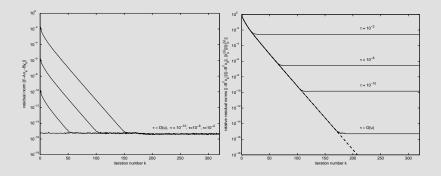


## Forward error of computed approximate solution

$$||x - x_k|| \le \gamma_1 ||f - Ax_k - By_k|| + \gamma_2 || - B^T x_k||,$$
  

$$||y - y_k|| \le \gamma_2 ||f - Ax_k - By_k|| + \gamma_3 || - B^T x_k||,$$
  

$$\gamma_1 = \sigma_{min}^{-1}(A), \ \gamma_2 = \sigma_{min}^{-1}(B), \ \gamma_3 = \sigma_{min}^{-1}(B^T A^{-1} B).$$



#### Null-space projection method

ullet compute  $x \in N(B^T)$  as a solution of the projected system

$$(I - \Pi)A(I - \Pi)x = (I - \Pi)f,$$

ullet compute y as a solution of the least squares problem

$$By \approx f - Ax$$
,

 $\Pi$  is the orthogonal projector onto R(B).

The least squares with B are solved inexactly, i.e. the computed solution  $\bar{v}$  of  $Bv\approx c$  is an exact solution of a perturbed least squares problem

$$(B+\Delta B)\bar{v}\approx c+\Delta c,\ \|\Delta B\|\leq \tau\|B\|,\ \|\Delta c\|\leq \tau\|c\|,\ \tau\kappa(B)\ll 1.$$

## Iterative solution of the null-space projected system

$$\begin{aligned} & \text{choose } x_0, \text{ solve } By_0 \approx f - Ax_0 \\ & \text{compute } \alpha_k \text{ and } p_k^{(x)} \in N(B^T) \\ & x_{k+1} = x_k + \alpha_k p_k^{(x)} \\ & \text{solve } Bp_k^{(y)} \approx r_k^{(x)} - \alpha_k Ap_k^{(x)} \\ & \text{back-substitution:} \\ & \textbf{A: } y_{k+1} = y_k + p_k^{(y)}, \\ & \textbf{B: solve } By_{k+1} \approx f - Ax_{k+1}, \\ & \textbf{C: solve } Bv_k \approx f - Ax_{k+1} - By_k, \\ & y_{k+1} = y_k + v_k. \end{aligned} \end{aligned} \end{aligned}$$
 inner iteration 
$$r_{k+1}^{(x)} = r_k^{(x)} - \alpha_k Ap_k^{(x)} - Bp_k^{(y)}$$


## Accuracy in the saddle point system

$$||f - Ax_k - By_k - r_k^{(x)}|| \le \frac{O(\alpha_3)\kappa(B)}{1 - \tau\kappa(B)} (||f|| + ||A||X_k),$$
$$|| - B^T x_k|| \le \frac{O(\tau)\kappa(B)}{1 - \tau\kappa(B)} ||B||X_k,$$
$$X_k \equiv \max\{||x_i|| \mid i = 0, 1, \dots, k\}.$$


Back-substitution scheme		$\alpha_3$
A:	Generic update	2.
	$y_{k+1} = y_k + p_k^{(y)}$	u
B:	Direct substitution	$\tau$
	$y_{k+1} = B^{\dagger}(f - Ax_{k+1})$	,
C:	Corrected dir. subst.	u
	$y_{k+1} = y_k + B^{\dagger} (f - Ax_{k+1} - By_k)$	

additional least square with B


## Generic update: $y_{k+1} = y_k + p_k^{(y)}$

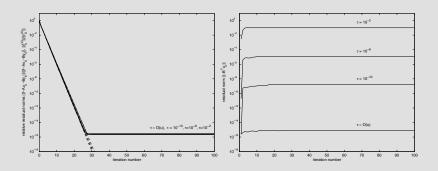

## Direct substitution: $y_{k+1} = B^{\dagger}(f - Ax_{k+1})$

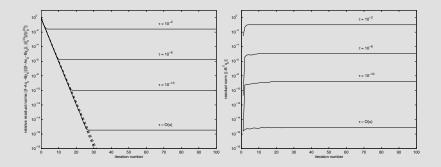


## Corrected direct substitution: $y_{k+1} = y_k + B^{\dagger}(f - Ax_{k+1} - By_k)$

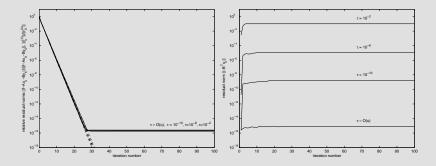

#### Conclusions

- All bounds of the limiting accuracy depend on the maximum norm of computed iterates, cf. [Greenbaum, 1997].
- The accuracy measured by the residuals of the saddle point problem depends on the choice of the back-substitution scheme [J, R, 2008].
- Care must be taken when solving nonsymmetric systems [J, R, 2007].



 The residuals in the outer iteration process and the forward errors of computed approximations are proportional to the backward error in solution of inner systems.

## Thank you for your attention.

 $\texttt{http://www.cs.cas.cz/}{\sim} \texttt{miro}$ 

- P. Jiránek and M. Rozložník. Maximum attainable accuracy of inexact saddle point solvers. *SIAM J. Matrix Anal. Appl.*, 29(4):1297–1321, 2008.
- P. Jiránek and M. Rozložník. Limiting accuracy of segregated solution methods for nonsymmetric saddle point problems. *J. Comput. Appl. Math.*, to appear.

#### References

- M. Benzi, G. H. Golub, and J. Liesen. Numerical solution of saddle point problems. *Acta Numer.*, 14:1–137, 2005.
- A. Greenbaum. Estimating the attainable accuracy of recursively computed residual methods. *SIAM J. Matrix Anal. Appl.*, 18(3):535–551, 1997.
- P. Jiránek and M. Rozložník. Limiting accuracy of segregated solution methods for nonsymmetric saddle point problems. *J. Comput. Appl. Math.*, 2007. to appear.
- P. Jiránek and M. Rozložník. Maximum attainable accuracy of inexact saddle point solvers. *SIAM J. Matrix Anal. Appl.*, 29(4):1297–1321, 2008.